



User control



Rear panel


■CM-21DXA



■CM-21VXA



Dimensions

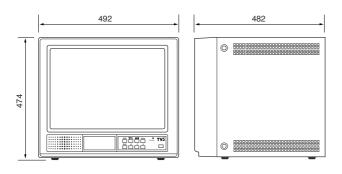

21" COLOR CCTV Monitor Smart Series

CM-21DXA / CM-21VXA

Features

- Auto loop through
- ▼ High performance with high resolution more than 500 TV lines
- ▼ Dual scanning system NTSC / PAL compatible
- ▼ Universal power input AC 100 ~ 240V
- ▼ Built-in clear and crisp speaker


CM-21DXA


- ✓ Multi-Language OSD (On Screen Display) user control
- ▼ Built-in 3 CH switcher by auto or manual
- ▼ Built-in microprocessor digital control

CM-21VXA

-0	in a time
Specification	
MODEL	CM-21DXA / CM-21VXA
Picture Tube	21" diagonal Flat Square Tube color
Horizontal Resolution	>500 TV lines (Center)
Scanning Frequency	15.734 KHz / 60 Hz (NTSC)
	15.625 KHz / 50 Hz (PAL)
Video Input	Composite video 1.0 V p-p 75 Ω
Video Connections CM-21DXA	Video BNC in x 2, Y/C in x 1
	Video BNC out x 2, Y/C out x 1
CM-21VXA	Video BNC in x 1, Y/C in x 1
	Video BNC out x 1, Y/C out x 1
Audio Connections CM-21DXA	RCA in x 3
	RCA out x 3
CM-21VXA	RCA in x 1
	RCA out x 1
Control Front CM-21DXA	Power on/off, OSD for
CM-21VXA	VR control
Power Input	AC 100 ~ 240V, 50/60 Hz
Power Consumption	80W max
Dimensions (WxHxD) Packing	648 x 645 x 640 mm
Product	492 x 474 x 482 mm
Weight Net	27.0 Kgs
Gross	29.0 Kgs
Operating Humidity Condition	10% ~ 90%
Operating Temperature Range	-10°C ~ +50°C

CCTV MONITOR SERIES

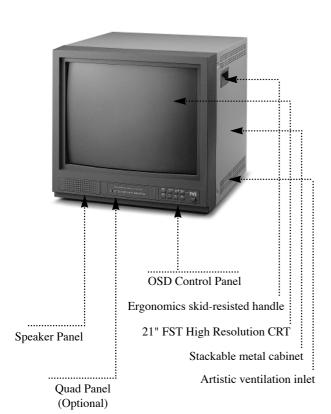

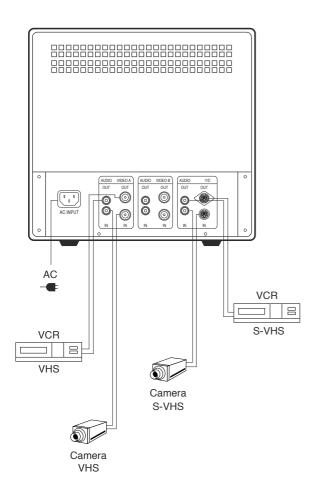

Innovative Design of TVS DXA Series

- ✓ Auto Video Loss Detect
- Auto No Signal Detect
- ✓ Auto Loop Through

2. Smart Control

- (2 Sets of BNC In/Out, 1 Set of Y/C In/Out)
- ▼ Dwell Time Control, Sequential Auto/Manual Switcher, SWITCH TIME 1 ~ 30 seconds

3. Smart View

- ✓ On Screen Display (OSD)
- ✓ Multi-Language, OSD in Trilingual Language (English/Japanese/Chinese), Maximum extend to 8 kinds of language.
- ▼ Illustration and Numerical Instruction

1. COLOR 6. VOLUME 2. TINT 7. SWITCHER MODE 3. BRIGHTNESS 8. LANGUAGE 4. CONTRAST 9. VERSION

EXIT:OSD

4. Smart Systems

5. SHARPNESS

- ✓ AC100V ~ 240V Universal Power Source
- Multiplexer and Quad

5. Smart Tooling

✓ Modularized design in front bezel with speaker panel, quad panel and control panel. Can use change-code function for various outward to meet customer's distinct demands.





