

# 12" B/W CCTV Monitor

## MM-12 • MM-12A



### Features

- ▶ Robust metal cover easy for store up
- ▶ High performance with high resolution more than 800 TV lines
- ▶ Universal power input AC 100 ~ 240V

#### MM-12


- ▶ Dual scanning system EIA/CCIR compatible

#### MM-12A


- ▶ Scanning system for EIA or CCIR compatible
- ▶ Built-in clear and crisp speaker

### User control

#### MM-12




#### MM-12A




### Rear panel


#### MM-12

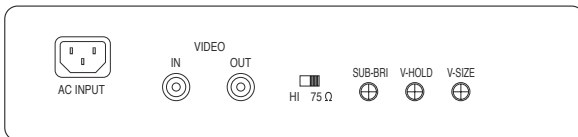

#### MM-12A

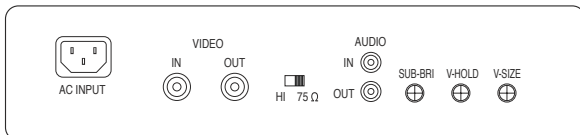

### Dimensions

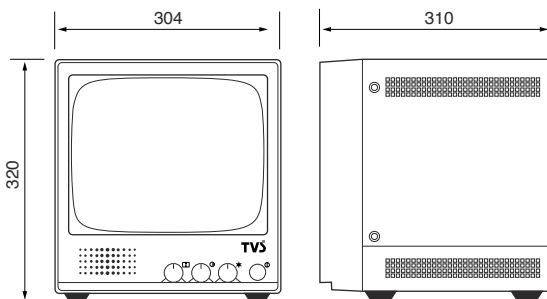

### Specification

|                                     |   |
|-------------------------------------|---|
| <b>MODEL</b>                        | MM-12 / MM12A   |
| <b>Picture Tube</b>                 | 12" diagonal B/W  |
| <b>Horizontal Resolution</b>        | >800 TV lines (Center)                                  |
| <b>Scanning Frequency</b>           | 15.750 KHz / 60 Hz (EIA)<br>15.625 KHz / 50 Hz (CCIR)   |
| <b>Video Input</b>                  | Composite video 1.0 Vp-p 75 Ω                           |
| <b>Video Connections</b>            | Video BNC in x 1<br>Video BNC out x 1                   |
| <b>Audio Connections</b>            | <b>MM-12A:</b> RCA in x 1<br>RCA out x 1                |
| <b>Control</b>                      | <b>MM-12:</b>   |
|                                     | <b>Front</b> Power on/off, Brightness, Contrast, V-Size |
|                                     | <b>Rear</b> 75 Ω / Hi, V-Hold, Sub-Bri, V-Size          |
| <b>Control</b>                      | <b>MM-12A:</b>  |
|                                     | <b>Front</b> Power on/off, Brightness, Contrast, Volume |
|                                     | <b>Rear</b> 75 Ω / Hi, V-Hold, Sub-Bri, V-Size          |
| <b>Power Input</b>                  | AC 100 ~ 240V, 50/60 Hz                                 |
| <b>Power Consumption</b>            | 30W max   |
| <b>Dimensions (WxHxD)</b>           | <b>Packing</b> 388 x 390 x 383 mm                       |
|                                     | <b>Product</b> 304 x 320 x 310 mm                       |
| <b>Weight</b>                       | <b>Net</b> 8.0 Kgs                                      |
|                                     | <b>Gross</b> 9.0 Kgs                                    |
| <b>Operating Humidity Condition</b> | 10% ~ 90%   |
| <b>Operating Temperature Range</b>  | -10°C ~ +50°C   |